


## WA-1130

High Speed Single Needle Lockstitch  
(WITH AUTOMATIC LUBRICATION)

單針平車縫紉機

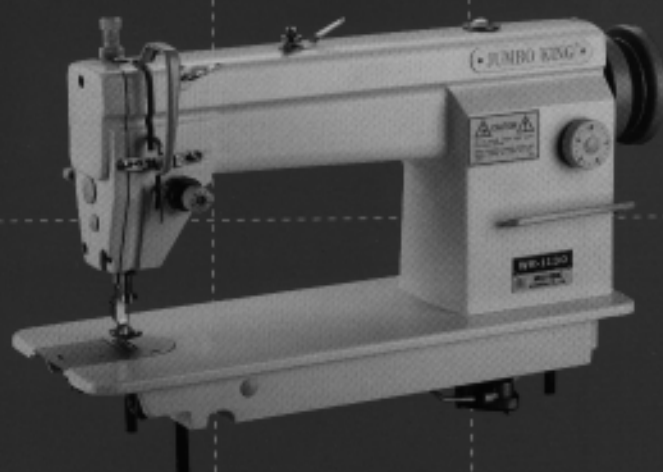

### 特點 / FEATURES

減少振動及噪音。  
縫製邊緣標準化,引導的配件設備。  
附有大的樹脂製的螺帽便於導線彈性功能。  
附有縫目長度調整鈕以改變形狀。  
增加螺帽與押腳調整螺絲。  
採用單直針、連杆挑線、旋梭勾線、構成雙線環式線迹。

Less vibration and noise.  
Standardized edge guide mounting adapter.  
Large resinous nut for thread.  
Changed the shape of the stitch. Length adjusting dial.  
Added the nut on the foot presser adjusting screw.  
With Single straight needle, link take-up and rotating hook to form Lockstitch.

### 用途及規格 / USAGE AND SPECIFICATIONS

用於：縫製薄料和中厚料的針綉、化纖等織品。  
最高縫速：3,500針/分鐘  
最大縫目：5.0mm  
使用針：DPX5

It is available to sew light to medium heavy weight material, such as Knit, cotton and Synthetic fabric.  
Max. Sewing Speed: 3,500 S. P. M.  
Max. Stitch Length: 5.0mm  
Needle: DPX5

### 特點 / FEATURES

減少振動及噪音。  
自動切線功能,採用獨立的電磁閥。  
縫製邊緣標準化,引導的配件設備。  
附有大的樹脂製的螺帽便於導線彈性功能。  
附有縫目長度調整鈕以改變形狀。  
增加螺帽與押腳調整螺絲。  
採用自動切線與自動倒縫功能,可提高縫製效率。  
採用單直針、連杆挑線、旋梭勾線、構成雙線環式線迹。

Less vibration and noise.  
With under-trimming, controlled by an independent solenoid.  
Standardized edge guide mounting adapter.  
Large resinous nut for thread.  
Changed the shape of the stitch. Length adjusting dial.  
Added the nut on the foot presser adjusting screw.  
With automatic under-trimming & automatic back tacking. Could increase the sewing efficiency.  
With Single straight needle, link take-up and rotating hook to form Lockstitch.

### 用途及規格 / USAGE AND SPECIFICATIONS

用於：縫製薄料和中厚料的針綉、化纖等織品。  
最高縫速：3,500針/分鐘  
最大縫目：5.0mm  
使用針：DPX5

It is available to sew light to medium heavy weight material, such as Knit, cotton and Synthetic fabric.  
Max. Sewing Speed: 3,500 S. P. M.  
Max. Stitch Length: 5.0mm  
Needle: DPX5

## WA-1130-T

High Speed Single Needle Lockstitch  
WITH THREAD TRIMMER & BACK TACKING

單針平車自動切線及倒縫

